

# UV Flatbed Printer

## FY-2513 series

L4244mm×W2050mm×H1381mm



### 2.44M × 1.22M print width

Economic equipment, no-worry quality



Model	FY-2513SE	FY-2513R		FY-2513T
Printhead	SPT 1024GS	G5	G6	CE4M
Print Size	2440mm x 1220mm			
Printhead configuration	2CMYK	2(2CMYK)	2(2CMYK)	2CMYK
Print Speed *	4PASS	48.2m <sup>2</sup> /h	28.8m <sup>2</sup> /h	41m <sup>2</sup> /h
	6PASS	32.4m <sup>2</sup> /h	20m <sup>2</sup> /h	27.8m <sup>2</sup> /h
	8PASS	23.8m <sup>2</sup> /h	15.1m <sup>2</sup> /h	20.5m <sup>2</sup> /h

1. The speed data are taken from the printer at high speed, a difference of 10% may occur when running with different computers.  
2. Product specifications are subject to change without notice in advance. Color and shape in picture are for reference, computer and monitor not included. All rights reserved!


### Features

- High-strength printhead plate, variety of printhead layout options available on one plate.
- Water-cooling LED lamp with better curing and lower power consumption.
- High-precision ball-screw used on Y and Z axis.
- Igus caterpillar chain used for tubing and cables.
- Double-tail flatbed structure for ease of media-loading.
- Double silent guide rail for stable carriage movement, high-precision and high-speed printing.

★ AI Scanner Available (Optional)

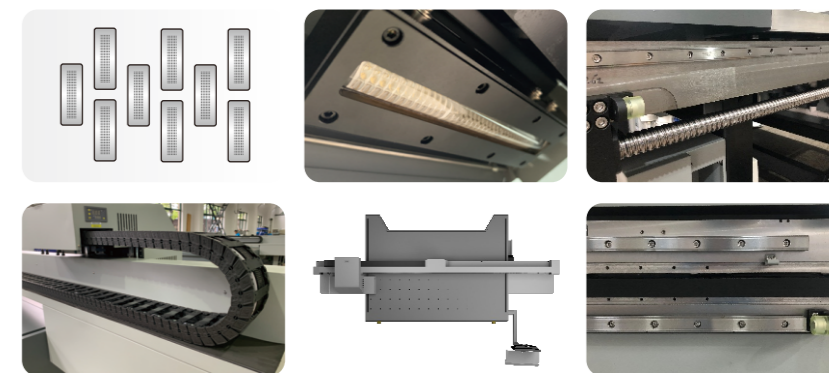

### Printhead & Layout Options

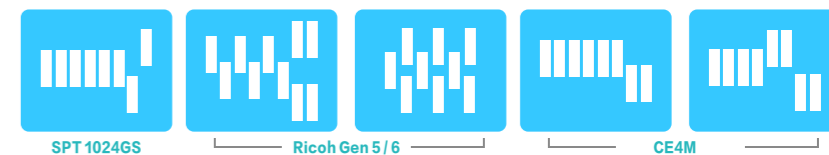

### Technical Parameters

Media weight & thickness: 75KG/m<sup>2</sup>, Max.10CM  
 Type: wood, density board, glass, metal, sheet, chevron board, PVC, Acrylic plate, ceramic tiles...  
 Ink: UV Curable Ink  
 Ink supply system: Negative pressure ink supply  
 Curing method: Water-cooling LED Lamps  
 RIP: UnitedFancy, FlexiPRINT, Maintop  
 Printer: AC220V 50HZ 3800W  
 Print Platform Vacuum Hold Down Area: AC220V 50HZ 2200W

### Application

