

High Speed Solvent Printer

FY-3200AT Plus

L4992mm×W1105mm×H1649mm



3.2M print width Spectacular Signage Solution


Specifications

Model		FY-3200AT Plus / H6	FY-3200AT Plus / H4
Printhead		SPT Alpha 1024HG	
Number of Printhead		6pcs	4pcs
Print width		3200mm	
Print Speed *	2PASS	390m ² /h	260m ² /h
	3PASS	260m ² /h	172m ² /h
	4PASS	195m ² /h	131m ² /h

1. The speed data are taken from the printer at high speed, a difference of 10% may occur when running with different computers.
2. Product specifications are subject to change without notice in advance. Color and shape in picture are for reference, computer and monitor not included. All rights reserved!

Features

- Specially enforced stainless steel for long-life strong and stable frame structure.
- 25% more nitrogen treated grid rollers.
- Starry platform for perfectly balanced heating and vacuum media hold-down.
- Special hot & cooling air circulation system plus IR lamps of specific wave length, to secure print and dry process.
- Double differential speed control design, auto smart tention bar, to ensure unattended printing to the very end of each media roll.
- Ink detectors in main tank and waste ink tank.

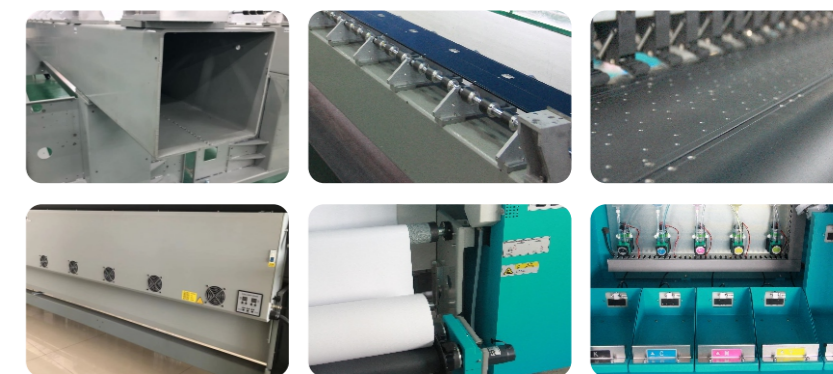

Options



Heating Take-up system

Double roll vinyl feeding system

Front single-row dryer


Technical Parameters

Media Type:	Banner, vinyl, mesh and other roll to roll outdoor printing material.
Ink:	Solvent ink Eco solvent ink
Cleaning and Maintenance System:	Individual positive pressure cleaning, manual one-piece capping, LED lamp at home position
Heating System:	Front, middle and back heater, IR dryer, fan cooling system
RIP:	UnitedFancy, FlexiPRINT, Maintop
Printer :	AC220V 50HZ 1100W
Dryer :	AC220V 50HZ 7200W
Platform heating :	AC220V 50HZ 2700W

Application



Wall Wrapping

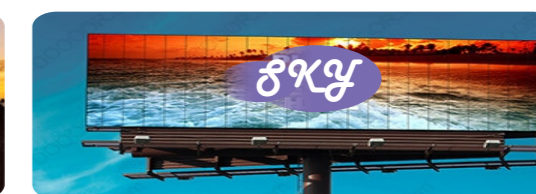

Bill Board



Interior Decor



Background